



JIEJIAN exhibition Technical Specification of Arch Roof Tents (ABT)

| Span | Bay | Eave Height | Ridge Height | Main Profile(4 channel) |
|------|-----|-------------|--------------|-------------------------|
| 15m | 5m | 3.88m | 5.73m | 204x120x4 mm |
| 20m | 5m | 3.88m | 6.53m | 204x120x4 mm |
| 25m | 5m | 3.88m | 7.33m | 204x120x4 mm |
| 20m | 5m | 3.92m | 6.33m | 256x121x5 mm |
| 25m | 5m | 3.92m | 7.15m | 256x121x5 mm |
| 30m | 5m | 3.92m | 7.87m | 256x121x5 mm |

The minimum length of these arch roof party tents is 20m, and the maximum is unlimited. We also supply custom tents that tailor made according to your site.

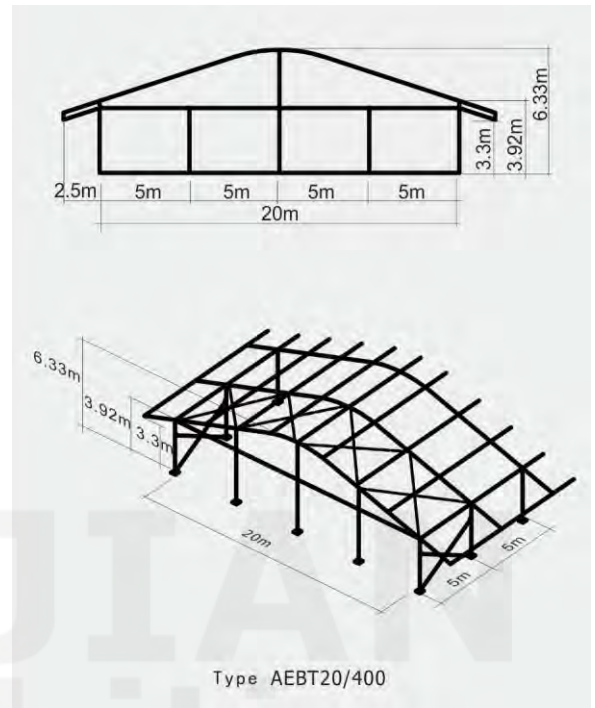

Optional Fittings

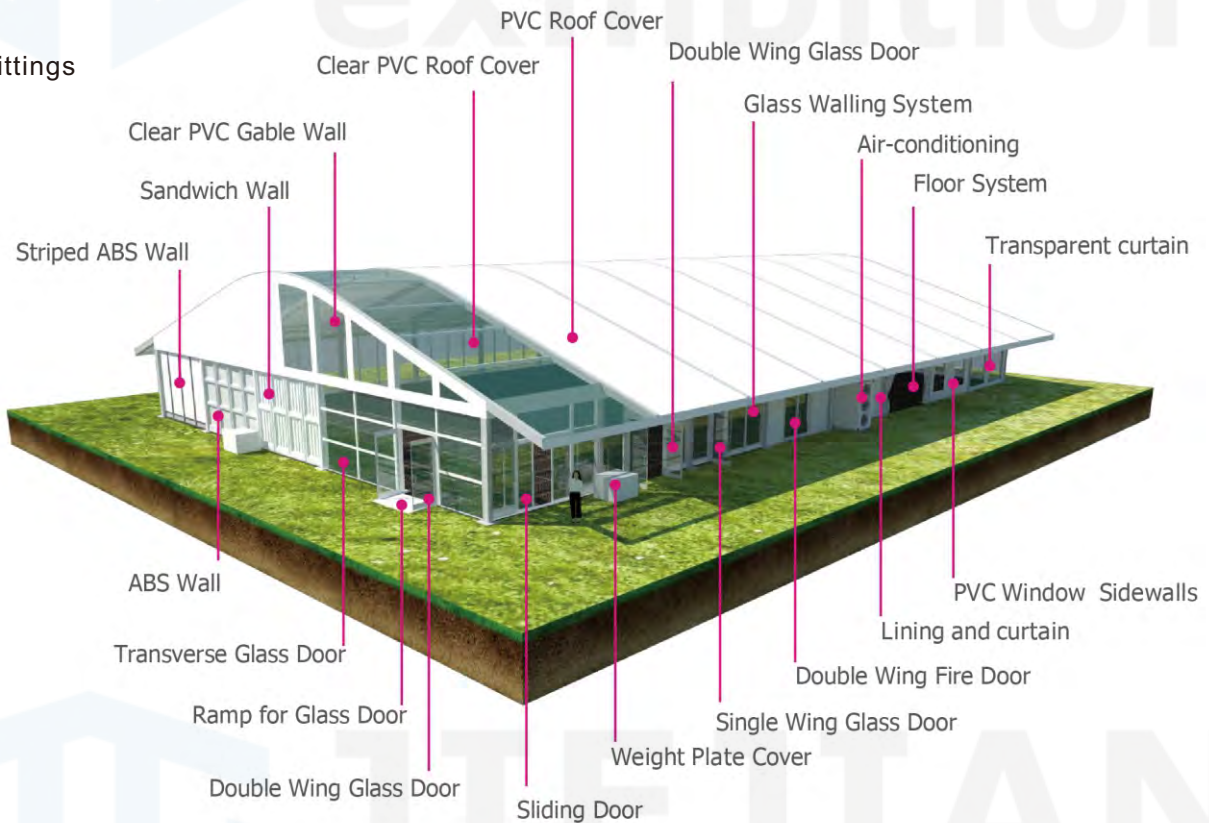

| | |
|----------------------------------|----------------------------|
| <p>Upright Support Roof Beam</p> | <p>Gable Pole</p> |
| <p>Ridge Purlin</p> | <p>Eave Purlin</p> |
| <p>Gable Beam</p> | <p>Intermediate Purlin</p> |
| <p>Eave Tension Rail</p> | |

Features

- Frame Material: hard pressed extruded aluminum 6061/T6(15HW)
- Cover Material: high quality double PVC-coated polyester textile, which is 100% waterproof, flame retardant, UV resistant, self-cleaning
- Connector: strong hot-dip galvanized steel
- Allowed Condition: -30 degree Celsius ~ +70 degree Celsius
- Wind load: max. 100km/h (can be reinforced)
- Snow load: 75kg/sqm
- Easy to be assembled and dismantled.
- No pole inside, 100% available interior space.