



# JIEJIAN exhibition Technical Specification of Canopy Tents (PAG)

Span	Bay	Eave Height	Ridge Height	Main Profile(4 channel)
3m	3m	2.5m	4.3m	65x65x2.5 mm
4m	4m	2.5m	4.8m	65x65x2.5 mm
5m	5m	2.5m	5.43m	65x65x2.5 mm
6m	6m	2.5m	5.92m	65x65x2.5 mm
8m	8m	2.6m	5.36m	122x68x3 mm
10m	10m	2.6m	6.38m	122x68x3 mm

Pagoda tent can be used as a single unit or combined by a rain gutter to make a larger party tent. Customized size or shape is available.

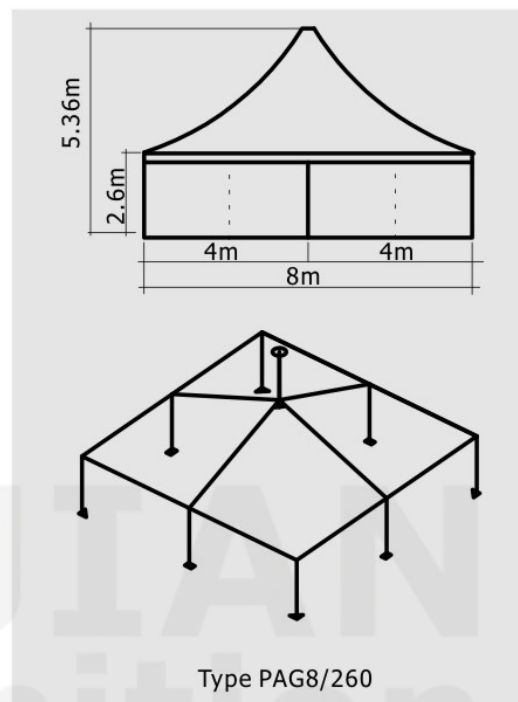

## Optional Fittings

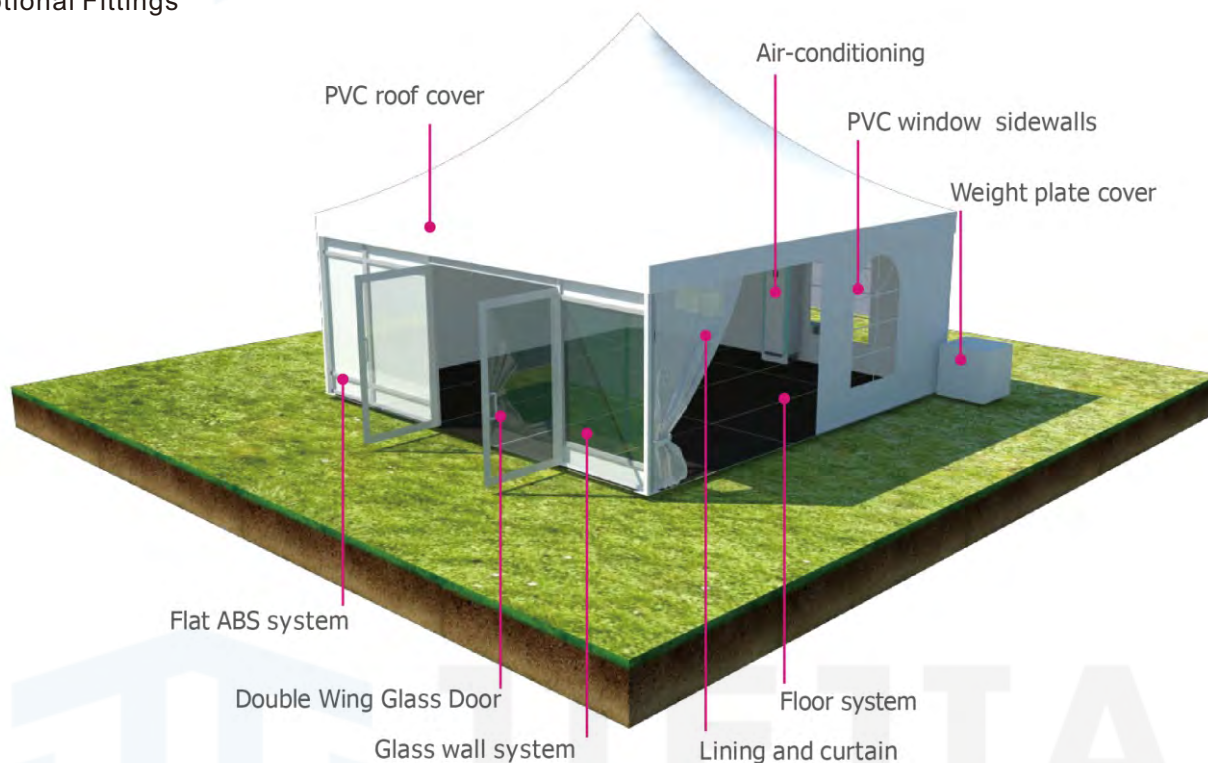

## Features

- Frame Material: hard pressed extruded aluminum 6061/T6(15HW)
- Cover Material: high quality double PVC-coated polyester textile, which is 100% waterproof, flame retardant, UV resistant, self-cleaning
- Connector: strong hot-dip galvanized steel
- Allowed Condition: -30 degree Celsius ~ +70 degree Celsius
- Wind load: max. 100km/h (can be reinforced)
- Snow load: 75kg/sqm
- Easy to be assembled and dismantled.
- No pole inside, 100% available interior space.

